

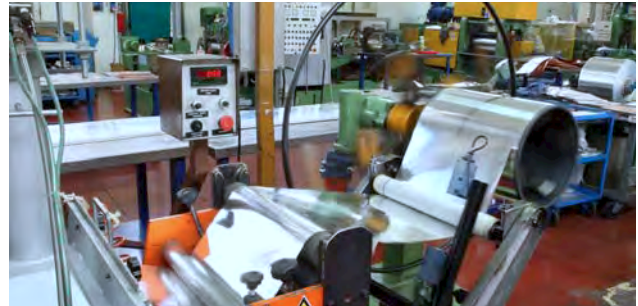


Rolling mill products

Standard Strips, Extra thin Strips, Strips to order

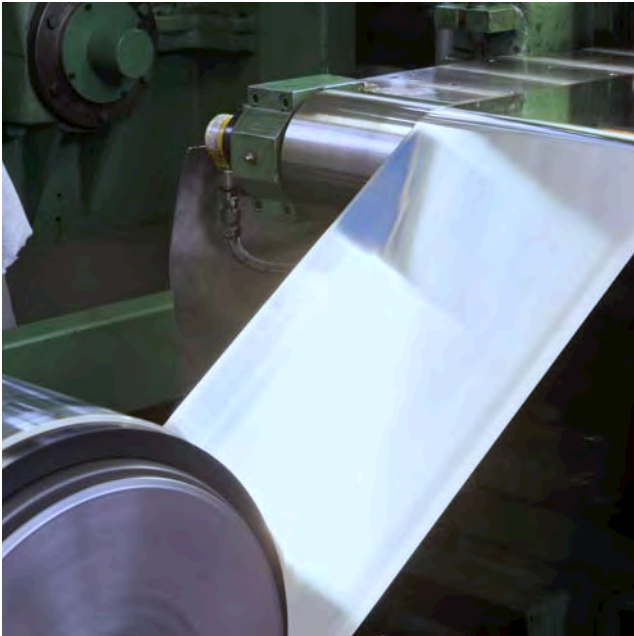

STANDARD STRIPS 925/°°

Thickness in mm	Standard size in mm	Dimension on request	Hardness	On request	Percentage
0,05-0,069	265-300-350-380	yes	soft	½ soft - hard	800/°°-925/°°-940/°°-999/°°
0,07-0,09	265-300-350-380	yes	soft	½ soft - hard	800/°°-925/°°-940/°°-999/°°
0,10-0,60	265-300-350-380	yes	soft	½ soft - hard	800/°°-925/°°-940/°°-999/°°

Standard strips are on plastic cores with an internal diameter of 120 mm. Thickness tolerance 0,005 mm.

EXTRA THIN STRIPS/TAPES 999/°°

Thickness in mm	Standard size in mm	Dimension on request	Hardness	On request	Percentage
0,015-0,019	350-380	yes	soft	½ soft - hard	999
0,020-0,029	350-380	yes	v	½ soft - hard	999

Extra thin strips are on alluminium cores with an internal diameter of 125 mm

STRIPS ON REQUEST

Thickness in mm	Standard size in mm	Dimension on request	Hardness	On request	Percentage
0,20-0,60	da 5,0 a 140,0 mm	yes	soft	½ soft - hard	800/°°-925/°°-940/°°-999/°°

Strips to order can be produced in widths from 5 mm up to 140 mm

Our values considering Vickers hardness

	Silver Alloy 800/°°	Silver Alloy 925/°°	Silver Alloy 930/°°	Silver Alloy 999/°°
soft	85 hv	69 hv	67 hv	38-45 hv
½ soft	120 hv	105 hv	102 hv	65-70 hv
hard	150 hv	145 hv	140 hv	100 hv